


# FUJI METAL LOCATOR

## *F-90M*

The advanced design of the F-90M Metal Locator contains a re-set function for storing and comparing measurements eliminating the need for adjustment of sensitivity.

The F-90M includes a waterproof search antenna that can locate metal objects under more than a foot of water.



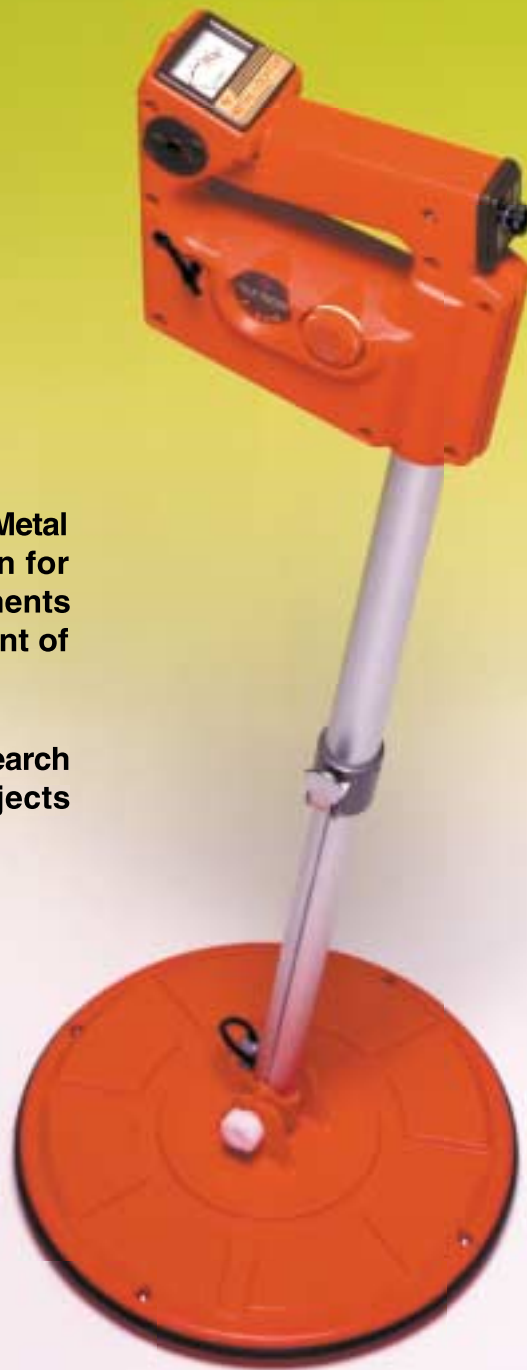


Instruments for the location of underground utilities and water leaks.

**FUJI TECOM INC.**

# FUJI METAL LOCATOR

## F-90M

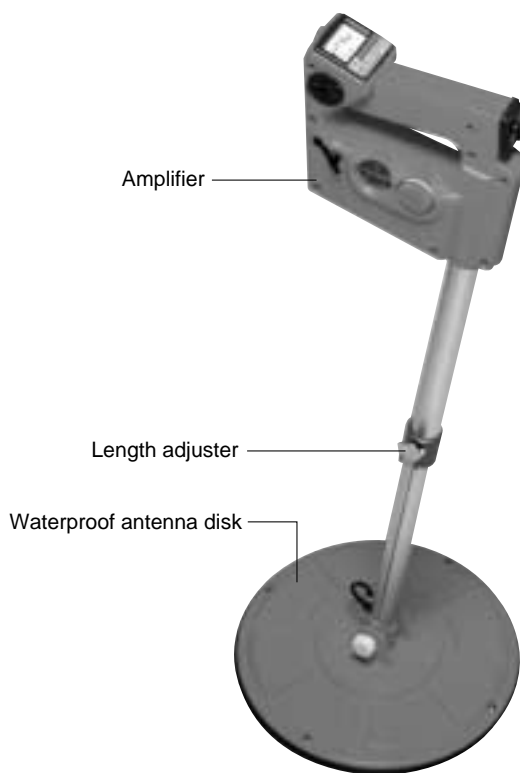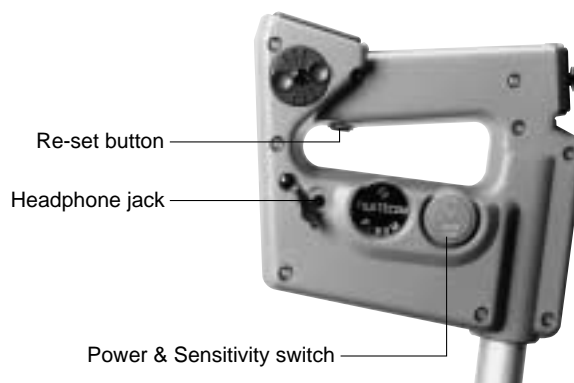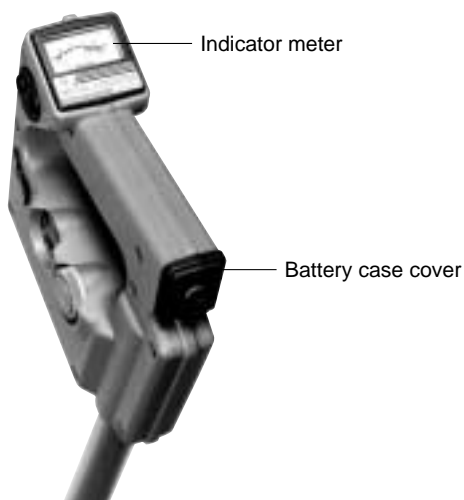

### FEATURES

- Large indicator meter of high sensitivity.
- Re-set function eliminating the need to pre-adjust sensitivity.
- Waterproof search antenna capable of locating objects under water
- High-soil conductivity function which minimizes the ground influence that can cause ghost effects or the appearance of ghost objects.
- Optional headphones are available. These are particularly useful on a site with background noise or windy conditions.
- Lightweight and collapsible, the F-90M is easy to carry and store.

### CONSTRUCTIONS

- The F-90M comes completely with a built-in amplifier, indicator meter and telescopic antenna.
- The F-90M includes :
  - Soft carrying case
  - Instruction manual
- Optimal accessories available :
  - Headphones

### SPECIFICATIONS

- |                              |  |
|------------------------------|--|
| • Frequency                  | : 9.7 kHz  |
| • Power & Sensitivity Switch | : Battery check and Sensitivity adjustment   |
| • Indicator                  | : Speaker and Indicator meter  |
| • Power                      | : Type AA (LR6) dry battery ×4pcs. (6V)  |
| • Battery Life               | : 40 hours on manganese alkaline cells   |
| • Operating temperature      | : 0°C ~ + 60°C   |
| • Detectable Depth           | : 40cm (15 3/4") for a steel disc 10cm (3.9") dia.<br>60cm (23 1/2") for a steel disc 18cm (7") dia. |
| • Weight                     | : 1.7kg (3.7lbs.)  |
| • Dimensions                 |  |
| Amplifier                    | : 170mm×195mm×60mm (6.7"×7.7"×2.4")  |
| Antenna                      | : φ 270mm×25mm (10.6" dia.×9")   |

We reserve the right to change specifications without prior notice.



Instruments for the location of underground utilities and water leaks.

## FUJI TECOM INC.

**Head office** : 1-3-1, Kanda Izumi-cho, Chiyoda-ku, Tokyo 101-0024, Japan  
TEL : +81-3-3862-3196 FAX : +81-3-3866-1979  
Web Site : <http://www.fujitecom.co.jp/>  
E-Mail : [kaigai@fujitecom.co.jp](mailto:kaigai@fujitecom.co.jp)

**Branch office** : Sapporo, Sendai, Tokyo, Shinetsu, Nagoya, Osaka  
Hiroshima, Kyushu

**Technical development & training center** : Niiza

AGENT